FEI Part Number	Dimension A in. (mm) +/- .250" (6.35)	B / C Max.	Stud Size D +/- .003	Stud Size E +/-.003	FEI Part Number	Dimension A in. (mm) +/- .250" (6.35)	B Max.	C Max.	Stud Size D +/- .003	Stud Size E +/-.003	FEI Part Number	Dimension A in. (mm) +/- .250" (6.35)	B / C Max.	Stud Size D +/- .003	Stud Size E +/-.003
3/4-01-004	4.0 (101.6)	.485"/(12.32)	.265 (6.73)	.265 (6.73)	3/4-02-004	4.0 (101.6)	.483 (12.26)	.837 (21.26)	.265 (6.73)	.515 (13.08)	3/4-03-004	4.0 (101.6)	.837 (21.26)	.515 (13.08)	.515 (13.08)
3/4-01-008	8.0 (203.2)	.485"/(12.32)	.265 (6.73)	.265 (6.73)	3/4-02-008	8.0 (203.2)	.483 (12.26)	.837 (21.26)	.265 (6.73)	.515 (13.08)	3/4-03-008	8.0 (203.2)	.837 (21.26)	.515 (13.08)	.515 (13.08)
3/4-01-012	12.0 (304.8)	.485"/(12.32)	.265 (6.73)	.265 (6.73)	3/4-02-012	12.0 (304.8)	.483 (12.26)	.837 (21.26)	.265 (6.73)	.515 (13.08)	3/4-03-012	12.0 (304.8)	.837 (21.26)	.515 (13.08)	.515 (13.08)
3/4-01-016	16.0 (406.4)	.485"/(12.32)	.265 (6.73)	.265 (6.73)	3/4-02-016	16.0 (406.4)	.483 (12.26)	.837 (21.26)	.265 (6.73)	.515 (13.08)	3/4-03-016	16.0 (406.4)	.837 (21.26)	.515 (13.08)	.515 (13.08)
3/4-01-020	20.0 (508)	.485"/(12.32)	.265 (6.73)	.265 (6.73)	3/4-02-020	20.0 (508)	.483 (12.26)	.837 (21.26)	.265 (6.73)	.515 (13.08)	3/4-03-020	20.0 (508)	.837 (21.26)	.515 (13.08)	.515 (13.08)
3/4-01-024	24.0 (609.6)	.485"/(12.32)	.265 (6.73)	.265 (6.73)	3/4-02-024	24.0 (609.6)	.483 (12.26)	.837 (21.26)	.265 (6.73)	.515 (13.08)	3/4-03-024	24.0 (609.6)	.837 (21.26)	.515 (13.08)	.515 (13.08)

Specifications subject to change without notice

1 AA59569F36T0781 Flat Braided Cable Specifications: (subject to change without notice)

AWG Size 7
Nom. Circular Area (Mils) 21600
Nom. Thick. (in) 0.040
Amps 88
F Braid 3/4

Construction 48-18-36
Nom. Flat Width (in) 3/4
Approx LBS/MFT 75.00
Cond. Material Tinned Copper

2 Terminal Specifications:

1.MATERIAL:COPPER
.050/(1.27) THICK REF.
PLATING : ELECTRO TIN

2.MATERIAL:COPPER
.057/(1.45) THICK REF.
PLATING : ELECTRO TIN

3 Solder option

All ground straps are RoHs compliant unless otherwise specified

*63/37 solder available by request

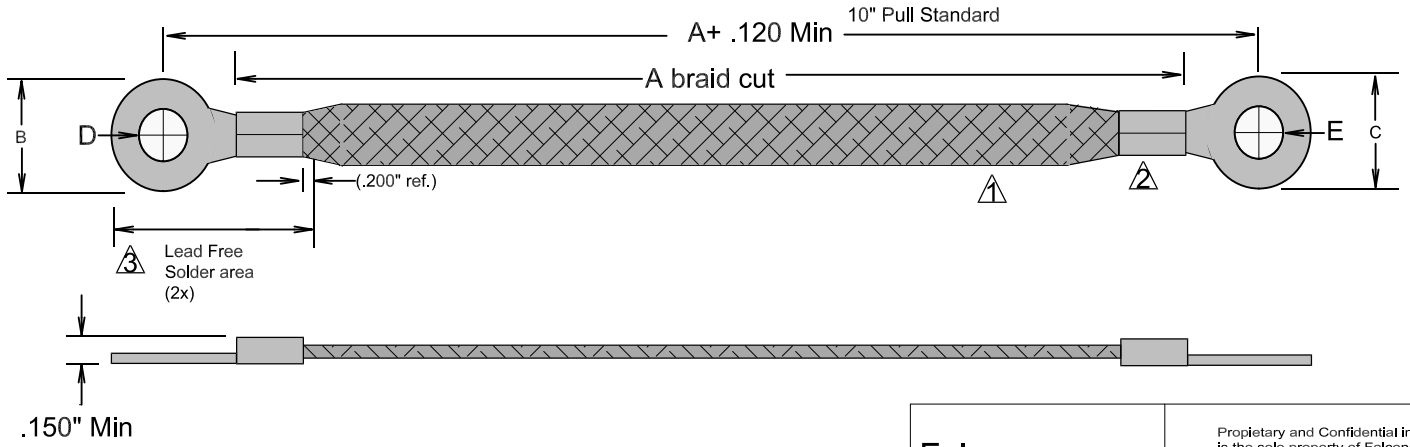

For customer use only

Falconer Electronics, Inc
Product Drawing
General Tol. Unless noted
+/-.250"
All Dim. Inches

Propietary and Confidential information contained in this drawn is the sole property of Falconer Electronics, Inc. Any reproduction in part or as a whole without the written permission of Falconer Electronics, Inc Is prohibited

TITLE: Braided Ground Strap
Straight .750 Series
Non insulated

SIZE	CAGE CODE	DWG NO	REV
B		750LL022020	C

SCALE N/A | 10/21/22 | SHEET